

# MINI EXCAVATORS



Concrete solutions. Always

**ES 18 ZT**

Operating weight 1,730 - 1,810 kg  
Engine power 11,2 kW - 15,3 HP


 **EUROCOMACH**



The extremely compact dimensions make the ES 15 SR (reduced rear rotation range) and ES 18 ZT (zero tail with enlarged carriage) your best allies for all your working needs both indoors and outdoors.



The undercarriage and blade can be widened from 990 mm to 1300 mm, ensuring greater stability and thus complete operating mobility.

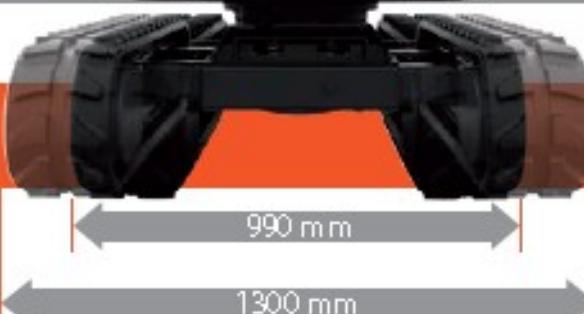

# LIKE THE GREATEST, JUST SMALLER.

## DIMENSIONS

The ES 18 ZT is a zero tail mini-excavator. The ballast remains inside the width of the tracks allowing operation in areas with reduced space where conventional machines are unable to operate.



Both models can be equipped with four upright roll-bar protection or cab. The choice allows unmatched versatility: minimum footprint for maximum performance.



ZERO TAIL

The ergonomic driver seat includes servo assisted controls, wrist rests and motion levers with closing pedals.



#### USB RADIO

The radio is equipped with a handy USB port.

# COMFORT, SAFETY AND FUNCTIONALITY. FINALLY TOGETHER



## COMMANDS AND CONTROLS

Both models have two motion modes: first gear with reduced speed and high thrust force and second speed with greater transfer speed. Everything is controlled by a practical button above the backfill blade lever.

Motion can be controlled using the advancement lever and integrated folding pedals that, once closed, increase the space available to the operator and prevent accidental use.

The foot board flush with the door makes for stepless exit from the cab and facilitates floor cleaning operations. It was designed to be able to be removed easily in order to perform extraordinary maintenance.



### STRAIGHT TRAVEL

In case of simultaneous control of the services and motion, the hydraulic system with variable displacement pumps simultaneously ensures the fluidity of movements and straight driving of the machine.



### AUTO TWO SPEED

When the excavator needs more thrust force, the automatic speed transmission intervenes, reducing the motion ratio.

## ALL CONTROLS AT YOUR SERVICE.

The cabin, with its generous interior dimensions, offers some of the best interior space in its class. The large width of the access door makes it easy to climb in and out.

The front windshield with assisted lift promotes maximum visibility due to its considerable width. The adjustable suspension seat combined with the floating cabin, adequately dampens vibrations and bumps, maximizing operator comfort.

The cab version is also equipped with a radio, glove compartment and battery charger.



The auxiliary hydraulic system and tilting are controlled by practical pedals with folding guards to prevent accidental use.

AUX



## VISIBILITY

The special design of the body and protective structures give the operator a wide field of vision, allowing easy control of the front tracked part.

The large windshield along with the upper rear window lets the operator keep an eye on the entire work area while remaining comfortably seated.



### WORK LIGHTS

A powerful light installed on the arm optimizes visibility even with low lighting.

# FLEXIBILITY, COMPACTNESS, ERGONOMICS.


The practical additional external ballast (optional) can, when needed, further increase the excellent operating stability without compromising the overall size of the machine.



## EFFICIENCY AND CONSUMPTION

The heart of the excavators is the efficient YANMAR 3TNV70 engine designed and built to optimize performance and reduce fuel consumption.

The long intervals between programmed maintenance contribute to economic efficiency, reducing costs and machine downtime.

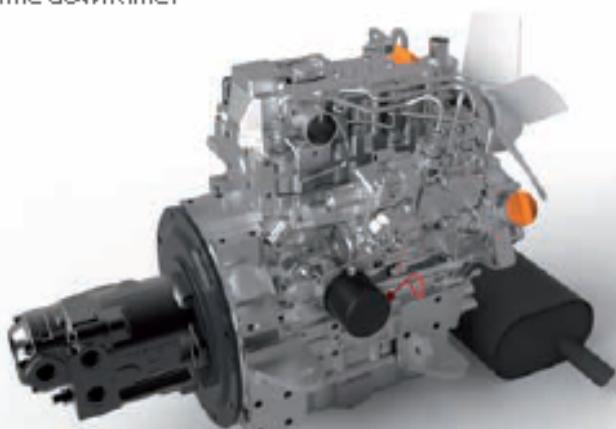

## SAFETY

Machine safety means operator peace of mind. Sensors monitoring the manipulator position prevent accidental control of the machine. The excavator startup system does not allow ignition when control of the commands is inactive. Safety belts, the cabin structure and rollbar with FOPS level I and TOPS certificate provide all of the safety needed in the cab in the event of an accident.



## OPTIONAL COUNTERWEIGHT

SPACE FOR SERVICES.



The rear engine compartment offers easy access to all filters on the heat engine (fuel, oil and air) in addition to easy topping up of cooling liquid and motor oil.



All access points for daily checks and for routine maintenance are easily accessible and concentrated in defined areas, optimizing machine downtime.



The battery, fuses and hydraulic oil top up can be reached through special compartments on the front of the drivers location.



#### ACCESSIBILITY

Common or dedicated access areas make every maintenance operation quick and easy.


# THE IMPORTANCE OF BEING RELIABLE.

## RELIABILITY

Designed and tested for high performance with continuous reliability.

The definition of the materials, the selection of components and design of the structures were created to exceed the most stressful and harsh work tests.

Standing out among these are the rotation column in fusion, the protections on the lifting cylinder and the steel blade and bonnets that increase efficiency and life of the product.

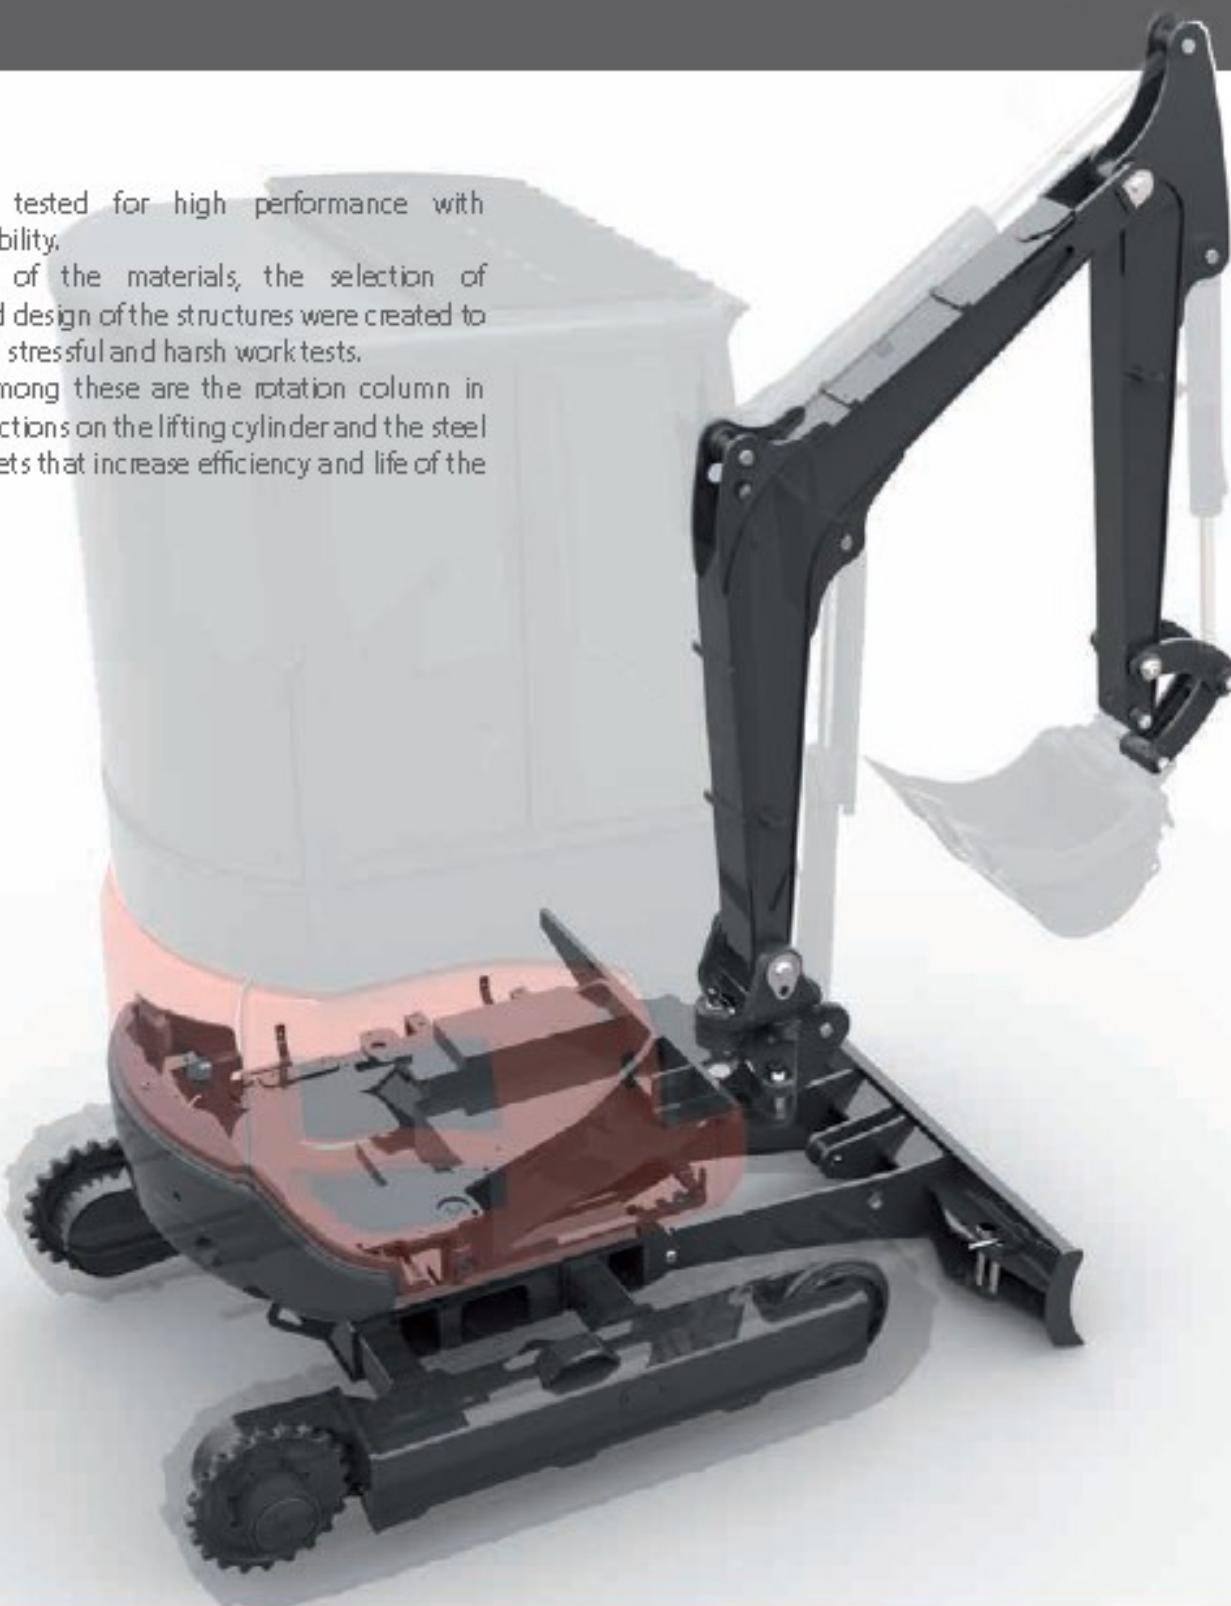

PERFORMANCE

# ECS: ONE CONCEPT, NUMEROUS POSSIBILITIES.

## UTILITIES AND SERVICES

We listen to all your needs so we can propose the best possible machine solution.

We consider our products to be not only simple machines but the best opportunity for our clients.

Among the services provided, the following are available:

- Customized paint
- Various types of tracks
- Auxiliary line hookups customized by type and quantity
- Additional equipment

The many configurations available allow you to make the best choice in relation to the work to be performed.





## SATELLITE MONITORING SYSTEM.

A composite image featuring a satellite in the upper left, emitting a bright beam of light that illuminates a map of Europe on a computer screen. A hand is visible on the right side, pointing towards the screen. The background shows a dark sky with stars and a glowing horizon from a space perspective.

**EUROCOMACH  
GEOSERVICE**

- Precise location of the machine on the Internet
- Antitheft device with alarm and notification via SMS/email
- High water temperature or low engine oil pressure alarm with notification via SMS/email
- Use time monitoring with alarm for service due

## OPTIONALS.

The wide range of equipment especially designed for Eurocomach mini excavators ensures the most appropriate use of the machine, maximizing performance.

A complete offer of optional fitting ensures the best performances.



Hydraulic system for chopper with additional pump (22 lt/min)



Auxiliary hydraulic system hookup with Proportional electrohydraulic control on the joystick





Customized paint

## TECHNICALS SPECIFICATIONS

Operating weight with canopy (with rubbertracks)	kg	1.730
Operating weight with cabin (with rubbertracks)	kg	1.810
Travelling speed	km/h	1 <sup>o</sup> :0÷2,2 / 2 <sup>o</sup> :0÷4,2
Slew speed	rpm	12
<b>ENGINE</b>		
Type	YANMAR 3TNV70	
Max Power (2.100 rpm)	kW - HP	11,2-15,2
Displacement	cc	854
Number of cylinders	n°	3
Cooling	water	
Consumption	lt/h	2,4
Alternator	V (A)	12 (35)
Battery	V (Ah)	12 (65)
<b>HYDRAULIC SYSTEM</b>		
Pump type	variable flow	
Pump displacement	cc	8 + 8 + 6,5
Pump capacity	lt/min	17,6 + 17,6 + 14,3
Max.circuit calibration pressure	bar	210
Auxiliary system:	Max capacity	36
	Max pressure	210
<b>PERFORMANCES</b>		
Max digging depth standard arm (optional arm)	mm	2.300 (2.500)
Max dumping height with canopy standard arm (optional arm)	mm	2.700 (2.850)
Max dumping height with cab standard arm (optional arm)	mm	2.530 (2.635)
Bucket breaking force (standard arm) ISO 6015	daN	1.550
Arm breaking force (standard arm) ISO 6015	daN	1.050
Traction force	daN	1.500
Ground bearing pressure with rubbertracks and canopy (with cabin)	kg/cm <sup>2</sup>	0,32 (0,33)
Max slope	60% - 30°	
<b>DIMENSIONS</b>		
Maximum width	mm	990 - 1.300
Total height	mm	2.357
Rear rotation radius	mm	650
Digging arm length std (optional)	mm	1.150 (1.350)
Tracks width	mm	230
Rollers number (for each side)	n°	3
<b>FILLINGS</b>		
Fuel tank	lt	18
Hydraulic oil tank	lt	20
Hydraulic circuit capacity	lt	30
Cooling system capacity	lt	4
Engine oil	lt	2,8
<b>CONTROLS</b>		
Boom, dipper stick, bucket and turret swing	2 pilot joysticks	
Track movements (included counter rotation)	2 pilot levers	
Dozer blade	1 lever	
Auxiliary circuit (simple or double effect)	left pedal	
Boom swing	right pedal	


	ES18 ZT		ES18 ZT		ES18 ZT			
	ES15 SR		ES15 SR		ES15 SR			
<b>ENGINE</b>			<b>SAFETY</b>		<b>UNDERCARRIAGE</b>			
Diesel engine 3 cylinders, displacement 854 cc, water cooled	•	•	Machine blocking device during exit/access to the driver's seat	•	•	Variable track undercarriage	/	•
Electric preheater	•	•	Engine ignition device only with the left console lowered	•	•	Backfill blade	•	•
Dry air filter with discharge valve and filter clogged indicator	•	•	Anti-slip climbing plate	•	•	Dozer blade cylinder protective casing	•	•
Double cartridge air filter	•	•	Climbing and descending handles	•	•	Motion engine casing	•	•
Cartridge engine oil filter	•	•	Emergency bar	•	•	Rotating joint protective casing	•	•
Cartridge fuel filter	•	•	Rearview mirror kit	•	•	Rubber tracks	•	•
Fuel filter with transparent water separation container	•	•	Anti-drift safety valve on the first arm, second arm and backfill blade	○	○	Iron tracks	○	○
Fuel tank discharge	•	•	Pressure accumulator that allows the arm to be lowered in the event of an engine failure	•	•	Rubber road pad for iron tracks	○	○
Auxiliary liquid refrigerant expansion tank	•	•				4 anchoring points for transport	•	•
<b>CANOPY</b>			<b>HYDRAULIC SYSTEM</b>		<b>UTILITY</b>			
4 upright rollbar ROPS-TOPS-FOPS (Level I)	•	•	Open circuit hydraulic system with variable capacity pump	•	•	Anti-theft system	○	○
Adjustable mechanical suspension seat	○	○	ISO hydraulic servo-control	•	•	Geo-service system for locating and remote diagnostics	○	○
Adjustable pneumatic suspension seat	○	○	Hydraulic oil intake filter	•	•	Second excavating arm 950 mm	•	/
Safety Belt	•	•	Rotation parking brake	•	•	Second excavating arm 1100 mm	○	/
Wrist supports	•	•	Motion parking brake	•	•	Second excavating arm 1,150 mm	/	•
Foot supports	•	•	Two-speed motion system	•	•	Second excavating arm 1,350 mm	/	○
Closable memo petals	•	•	Single and double effect hydraulic system	•	•	Additional external counterweight	○	○
Comfort rubber footrest	•	•	Hydraulic setup for calliper rotor (with switches on bucket cylinder)	○	○	Colour customizations (NL specific)	○	○
Driver seat platform assembled on 4 vibration damping elastic supports	•	•	Hydraulic setup for chopper (with additional pump)	○	○	4 anchoring points for lifting	•	•
Indicator light for hydraulic filter and engine air intake filter dog	•	•	NUX 2: Hydraulic setup for calliper rotor with pedal control (excludes lifting operation)	○	○	On-board visual fuel level indicator	•	•
Water temperature and fuel level indicators	•	•	NUX 2: System setup for calliper rotor with proportional electro-hydraulic control on the Right joystick	○	○	Lifting cylinder protective casing	•	•
Hour counter	•	•						
High water temperature alarm	•	•						
Warning buzzer	•	•						
Singlepole 12 volt power supply outlet	•	•						
<b>CAB</b>			<b>ELECTRICAL SYSTEM</b>					
Cab ROPS-TOPS - ROPS (Level I)	○	○	Work lights on the lifting arm	•	•			
Adjustable seat	•	•	Supplementary work lights on the lifting arm	○	○			
Adjustable mechanical suspension seat	○	○	Supplementary front canopy/cap lights	○	○			
Adjustable pneumatic suspension seat	○	○	Supplementary rear canopy/cap lights	○	○			
Safety Belt	•	•	Rotating light	○	○			
Wrist supports	•	•	Battery disconnect switch	•	•			
Closable memo petals	•	•	Waterlight connectors (IP67)	•	•			
Comfort rubber footrest	•	•						
Heating system with speed adjustment	•	•						
Sliding right side window	•	•						
Windshield with assisted opening system (gas springs)	•	•						
Rolling sun blind	•	•						
Courtesy light	•	•						
Indicator light for hydraulic filter and engine air intake filter dog	•	•						
Water temperature and fuel level indicators	•	•						
Hour counter	•	•						
High water temperature alarm	•	•						
Warning buzzer	•	•						
Radio AM/FM/USB	○	○						
Singlepole 12 volt power supply outlet	•	•						
Front windshield wipers with sprayer and speed control	•	•						

STANDARD EQUIPMENT     •  
 OPTIONAL EQUIPMENT     ○  
 NOT AVAILABLE     /

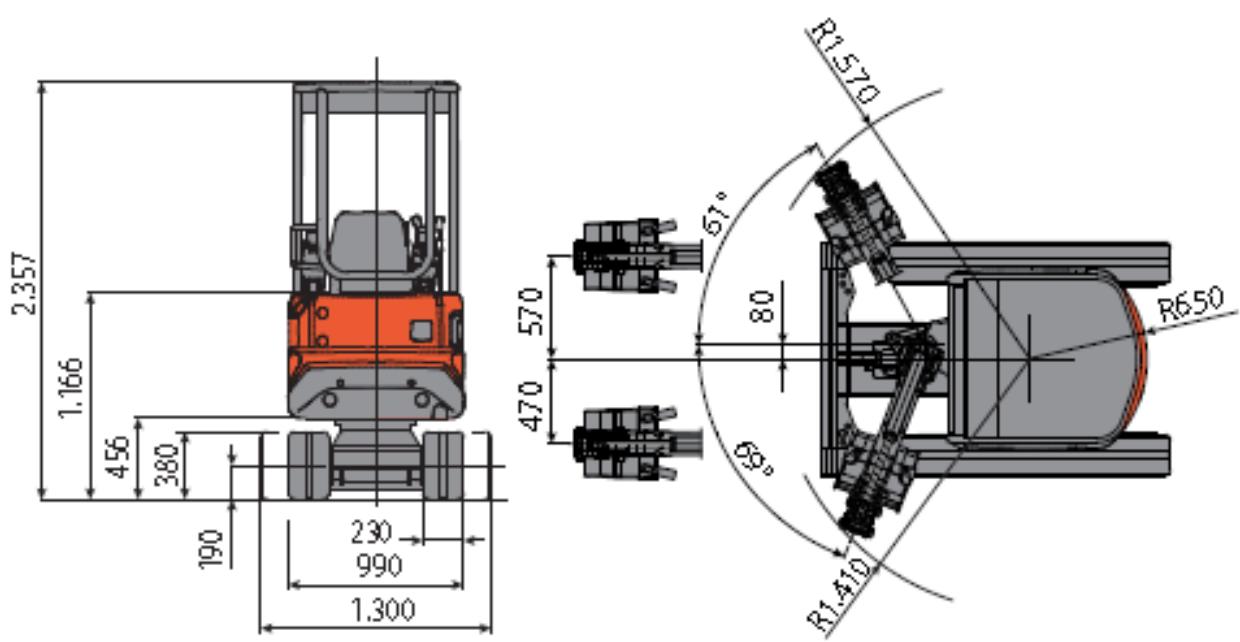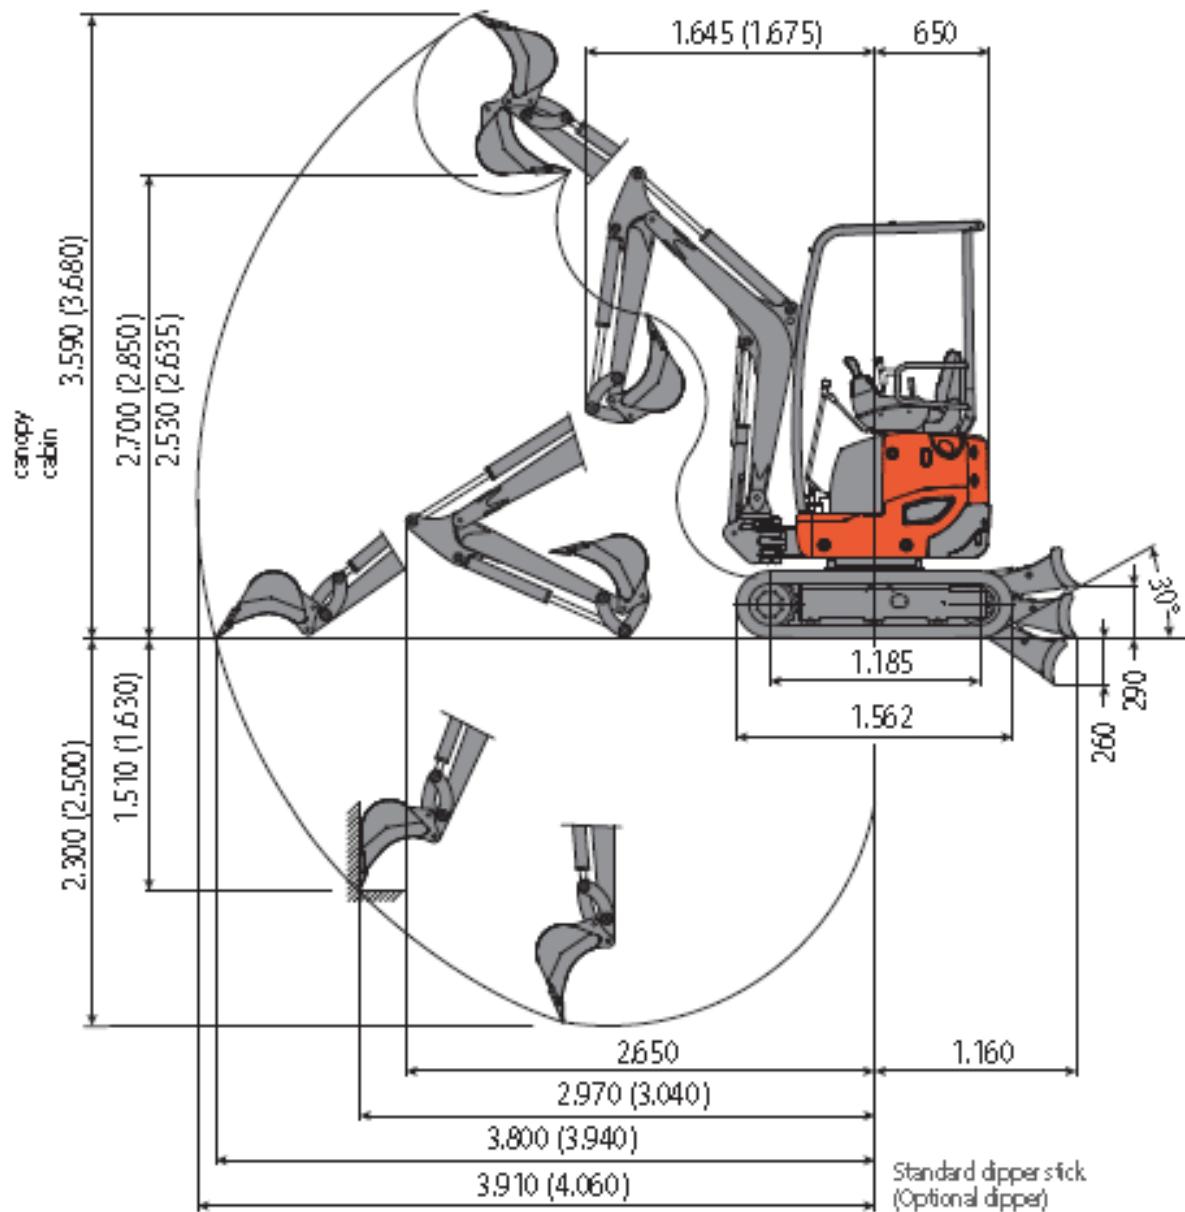

## LIFTING CAPACITY

The lifting capacity is based on ISO 10567 and does not exceed 75% of the static tipping load or 87% of the hydraulic lifting capacity of the machine.

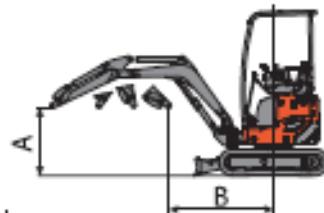

The straddle refers to the centre of rotation.


\* Indicates the hydraulic load limit.

0 m refers to ground level.

The machine is understood to be equipped with a cab, rubber tracks, without a bucket and without a quick coupling.



Front



Side

Unitton

Blade raised, Standard Arm (1150 mm)

(\*) the values in parenthesis are with additional ballast: 0.08 ton

A (m)	B (m)								
	1.0		2.0		3.0		MAX		
2.0			0.41 (0.41)	0.36 (0.24)	0.32 (0.26)	0.21 (0.24)	0.31 (0.34)	0.16 (0.19)	3,13 m
1.0			0.44 (0.44)	0.34 (0.22)	0.24 (0.26)	0.19 (0.22)	0.22 (0.25)	0.14 (0.16)	3,40 m
0			0.54 (0.54)	0.35 (0.23)	0.24 (0.29)	0.18 (0.24)	0.23 (0.26)	0.15 (0.17)	3,29 m
-1.0	0.41 (0.41)	0.41 (0.41)	0.55 (0.55)	0.25 (0.47)			0.38 (0.41)	0.18 (0.22)	2,74 m

Blade lowered, Standard Arm (1150 mm)

(\*) the values in parenthesis are with additional ballast: 0.08 ton

A (m)	B (m)								
	1.0		2.0		3.0		MAX		
2.0			0.41 (0.41)	0.36 (0.24)	0.36 (0.36)	0.21 (0.21)	0.31 (0.34)	0.18 (0.21)	3,13 m
1.0			0.44 (0.44)	0.34 (0.22)	0.31 (0.31)	0.19 (0.24)	0.22 (0.25)	0.15 (0.18)	3,40 m
0			0.26 (0.26)	0.35 (0.23)	0.3 (0.3)	0.18 (0.22)	0.23 (0.26)	0.16 (0.19)	3,29 m
-1.0	0.41 (0.41)	0.41 (0.41)	0.55 (0.55)	0.25 (0.47)			0.38 (0.41)	0.21 (0.24)	2,74 m

Blade raised, Optional Arm (1350 mm)

(\*) the values in parenthesis are with additional ballast: 0.08 ton

A (m)	B (m)								
	1.0		2.0		3.0		MAX		
2.0			0.4 (0.4)	0.34 (0.23)	0.31 (0.24)	0.19 (0.22)	0.31 (0.34)	0.16 (0.19)	3,35 m
1.0			0.43 (0.43)	0.33 (0.21)	0.29 (0.24)	0.18 (0.21)	0.22 (0.25)	0.14 (0.16)	3,60 m
0			0.53 (0.53)	0.34 (0.22)	0.22 (0.07)	0.17 (0.22)	0.23 (0.26)	0.15 (0.17)	3,50 m
-1.0	0.4 (0.4)	0.4 (0.4)	0.54 (0.54)	0.24 (0.46)			0.38 (0.41)	0.18 (0.22)	2,99 m

Blade lowered, Optional Arm (1350 mm)

(\*) the values in parenthesis are with additional ballast: 0.08 ton

A (m)	B (m)								
	1.0		2.0		3.0		MAX		
2.0			0.4 (0.4)	0.34 (0.23)	0.37 (0.37)	0.19 (0.21)	0.31 (0.34)	0.18 (0.21)	3,35 m
1.0			0.43 (0.43)	0.33 (0.21)	0.3 (0.3)	0.18 (0.22)	0.22 (0.25)	0.15 (0.18)	3,60 m
0			0.25 (0.25)	0.34 (0.22)	0.29 (0.29)	0.17 (0.21)	0.23 (0.26)	0.16 (0.19)	3,50 m
-1.0	0.4 (0.4)	0.4 (0.4)	0.54 (0.54)	0.24 (0.46)			0.38 (0.41)	0.21 (0.24)	2,99 m